
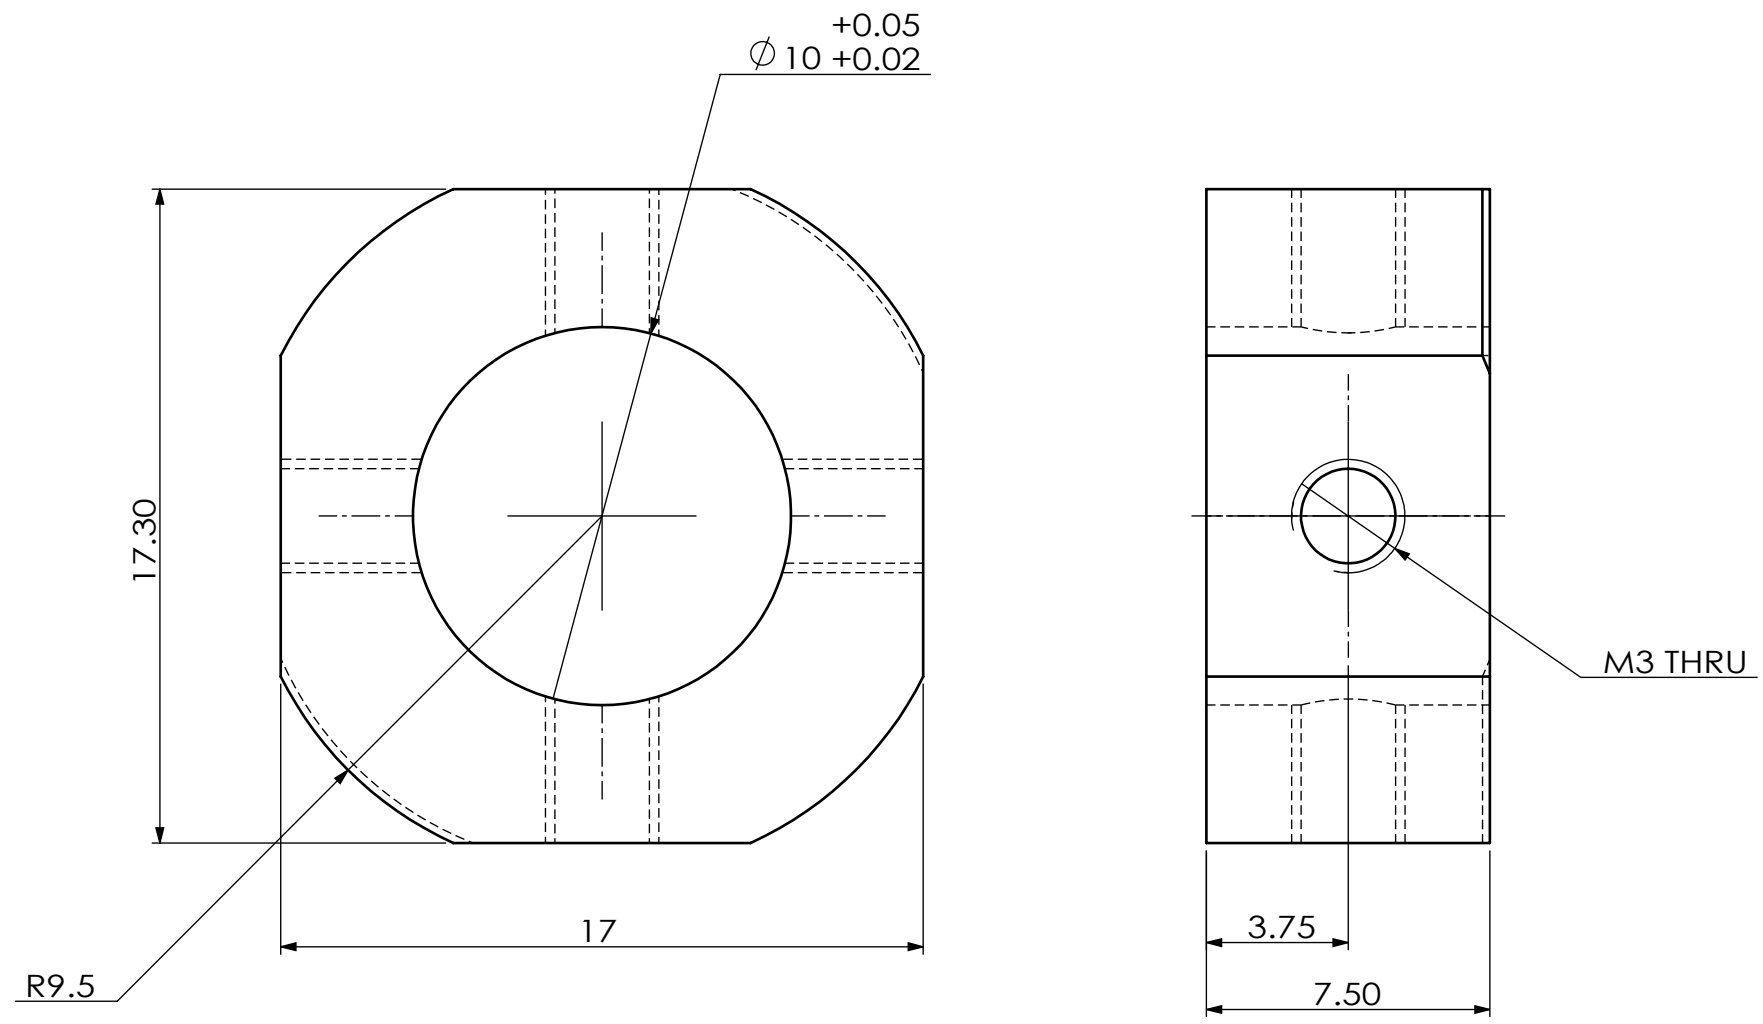




技术要求

- 1、锐角倒钝，去除毛刺飞边，未注倒倒C0.5，未注圆角R0.5。
- 2、未注形位公差按GB/T 1184-H。

THE DRAWING & INFORMATION CONTAINED
HEREIN ARE THE PROPERTY OF WILLIAM
AUTOMATION EQUIPMENT CO.,LTD.. WHICH SHALL
NOT BE DISCLOSED, REPRODUCED OR USED
WITHOUT THE COMPANY PRIOR WRITTEN CONCENT.

x. ±0.05	x.° ±0.5°	MAT'L				REV.:			
.X ±0.03	.x° ±0.2°	S45C							
.XX ±0.02	.xx° ±0.05°								
.XXX ±0.05	.xxx° ±0.02°								
DR:		2026/6/30		EQUIPMENT: 三轴焊锡机					
CHKD:				TITLE:					
APPD:		FINISH: 镀铬		DWG NO.:		刀片锁紧轮			UNITS
		Q'YT: 1		SCALE:		5:1	SHEET:	1/1	mm